

Filtering

by Bruce A. Black

Objectives

In this project a square wave is to be passed through a simple low-pass filter and the output measured in the laboratory. MATLAB will be used to generate a Fourier series representation of the filter output, and you will be able to see how adding the complex exponential components of the Fourier series produces the actual output waveform.

Equipment

HP8116A Function Generator
HP54504A Digital Oscilloscope
Orange Butterworth Filter

BNC T-connector
50 Ω termination

Background

A periodic signal can be represented by the complex exponential form of the Fourier series. When a periodic signal is applied to the input of a filter, each of the harmonic components of the input signal experiences an amplitude and phase change caused by the filter. At the filter output the harmonic components add together to produce the output waveform. The amplitude and phase changes experienced by each of the input components combine to make the output signal different from the input signal in a predictable way.

Stated mathematically, suppose $x(t)$ is a periodic input signal with period T_0 , $H(f)$ is the frequency response of the filter, and $y(t)$ is the filter output. Then $x(t)$ can be written

$$x(t) = \sum_{k=-\infty}^{\infty} a_k e^{j2\pi k f_0 t}, \text{ where } f_0 = 1/T_0.$$

As the input signal passes through the filter, the input coefficients a_k become altered by the filter to become the output coefficients b_k , where

$$b_k = H(kf_0) a_k.$$

The output $y(t)$ is then given by

$$y(t) = \sum_{k=-\infty}^{\infty} b_k e^{j2\pi k f_0 t} = \sum_{k=-\infty}^{\infty} H(kf_0) a_k e^{j2\pi k f_0 t}$$

In practice there are not usually an infinite number of components to be added to produce either $x(t)$ or $y(t)$; only components with significant amplitudes need to be included.

Pre-Lab

1. The transfer function of a Butterworth filter of order n has n poles (and no zeros) in the left half plane. These poles are equally spaced around the circumference of a circle whose radius

is equal to the 3 dB frequency of the filter in rad/s. The Orange Boxes are Butterworth filters of order five, designed so that $H(s)$ represents the filter's insertion loss. In a previous lab project you measured the 3 dB frequency of one of these filters. Using the pole-zero diagram of Fig. 1 and your measured 3 dB frequency, calculate the locations of the poles of $H(s)$. Use these to obtain an *analytic* expression for the frequency response $H(f)$. You may assume that $H(0) = 1$.

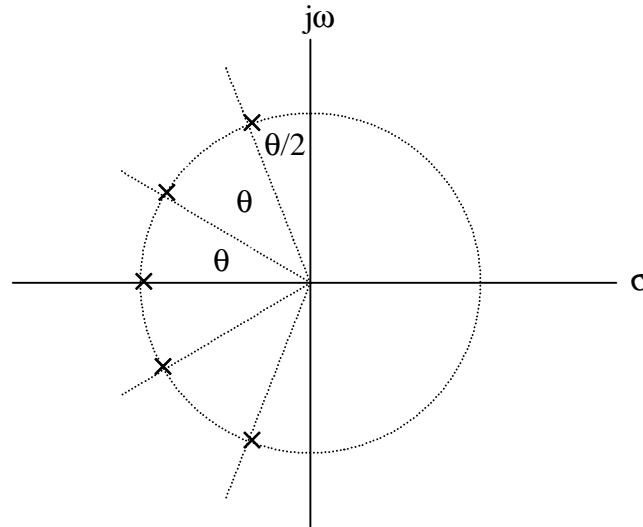


Figure 1: Pole-Zero Diagram of a Butterworth Filter

2. The input $x(t)$ to the filter will be a square wave with a period $T_0 = 1$ ms and a peak-to-peak amplitude of 1 V. (That is, the square wave switches between zero and one volt.) Find the coefficients a_k of the Fourier series for the input. Include terms for k running from $k = -9$ to $k = 9$.
3. Using your frequency response $H(f)$, calculate the coefficients b_k of the filter output for $k = -9$ to $k = 9$.
4. Using MATLAB, generate the output waveform $y(t)$. The most efficient way to do this is using your function `sumexp.m` from the previous week's lab project.

Procedure

Filtering for Real

Use the HP8116A function generator to generate a pulse train of duty cycle 1/2 and period $T_0 = 1$ ms. Set the peak-to-peak amplitude of the pulse train to 1 V when the function generator is terminated in a 50Ω load. Now insert the Orange Filter between the function generator and the load. Observe the output signal on the HP54504A Digital Oscilloscope (use Channel 1). Set the oscilloscope so that the display looks as much like your prelab prediction of the output waveform as possible. Now use the LabVIEW program "ViewScope" to capture the oscilloscope display into a file. Load the file into MATLAB and verify that you can plot it.

Note: The file produced by ViewScope contains three columns of data. The first column contains values of time, the second column contains the measurements from Channel 1 of the

oscilloscope, and the third column contains measurements from Channel 2. You can extract the data from this file like this:

```
>> load filename.dat
>> t=filename(:,1);
>> y=filename(:,2);
```

Filtering in MATLAB

In MATLAB, generate a square wave x of period $T_0 = 1$ ms and a peak-to-peak amplitude of 1 V. Use the time array t from your oscilloscope data to determine the sampling interval and the number of points for your square wave. You can “construct” a fifth-order Butterworth filter with the command

```
[b a]=butter(5,2*f3*deltat);
```

where f_3 is the 3 dB frequency of your filter and $deltat$ is the time spacing between points in your input signal x . Now pass the input x through the filter by using the command

```
y=filter(b,a,x);
```

Plot the output and verify that it is correct.

Report

You should have three different versions of the filter response to a square wave: The Fourier series prediction from the pre-lab, the measured filter output from lab, and the output from the MATLAB filter. Plot all three of these on a single graph. Print it out and tape it in your lab notebook. Comment on the similarity between the three plots. Would the Fourier prediction have approximated the measured output more accurately if you had included more terms in the Fourier series? Be sure that all members of your lab group sign the lab notebook, and hand the notebook in at the end of lab.