

Example


To help isolate a large and heavy optics table from building vibrations, the table is floated on four isolation pads like the one shown in the figure. The isolation pad consists of a cylindrical cavity of diameter D filled with a dense liquid (S.G. = 13.6) and a piston with diameter d attached to the table.

Initial Conditions:

- $H = 20$ cm
- $h = 15$ cm
- $D = 18$ cm
- $d = 9$ cm
- $V_p = 1$ cm/s

You have been asked to determine how the vertical motion of the piston affects the motion of the liquid in the cavity.

- Determine the mass of liquid in the cavity, in kg. **Use symbols first!**
- If the piston moves downward with a constant velocity V_p , what is the direction and magnitude of the motion of the free surface of the liquid: i.e. what is dH/dt in terms of V_p ? **Use symbols first!**
- In another design, liquid can be added or removed from the base of the cavity, to maintain H at a constant value. Determine the direction and magnitude of the required mass flow rate.

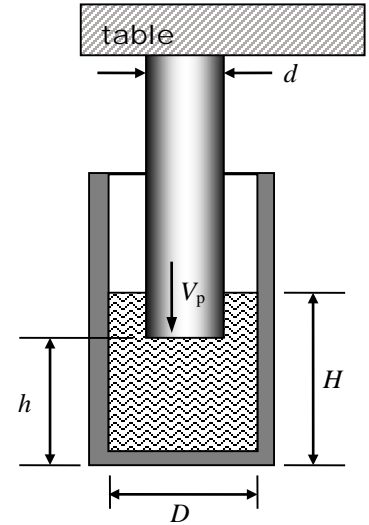

A cylindrical isolation pad