Name:

Use this quiz to help you prepare for the Paper-and-Pencil portion of Test 1. Complete it electronically or print it and complete it by hand, your choice. **Answer all questions.** Make additional notes as desired. Not sure of an answer? Ask your instructor to explain in class and revise as needed then.

Throughout, where you are asked to "circle your choice", you can circle or underline it (whichever you prefer). Throughout, assume that there are no global variables (if you happen to know what they are).

1. Consider the **secret** function defined to the right. What are the values of:

```
def secret(x):
   y = (x + 1) ** 2
   return y
```

- a. secret(2)
- b. secret(secret(2))
- 2. Consider the *mystery* function defined to the right. What are the values of:
 - a. **mystery(5, 2)**
 - b. mystery(2, 5)
 - c. x = 2y = 5mystery(x, y)
 - d. x = 2y = 5mystery(y, x)
- 3. Consider the code snippet to the right. Explain briefly why there is a **red X** beside **Line 3**.

```
def mystery(x, y):
    result = x + (3 * y)
    return result
```


```
1⊖ def main():
       foo(10)
3
       print(n)
6 def foo(m):
       n = m + 20
```


4. Consider the code snippet to the right. Explain briefly why there is a **red X** beside **Line 7**.


```
1⊖def main():
      a = 3
```

5. Consider the code snippets defined below. They are contrived examples with poor style but will run without errors. For each, what does it print when main runs?

(Each is an independent problem. Pay close attention to the order in which the statements are executed.)







4.

Hint: This is a trick question.

Hint: This is a trick question.

6. What is the value of each of the following expressions?


'fun' + 3

10 ^ 2


17 // 4	Hint: This is a WHOLE number (i.e., integer
17 % 4	Hint: This is the REMAINDER from 17 //
3 / 4	
7 % 2	Aside: If $x \% 2 == 0$, then x is EVEN. If $x \% 2 == 1$, then x is ODD.
7 ** 2	
'fun' + 'ny'	
'hot' * 5	

7. For each of the 3 code snippets below, what does it print? (Write each answer directly below its code snippet.)

Hint: Solve problems like this by make a table with the variables, showing the places where their values change. Here is an example of a table appropriate for the 3rd (rightmost) problem. It was made by tracing the code by hand, starting from line 1 of the table (which came from the statement b = 0) and continuing downward from there as the by-hand trace continues.

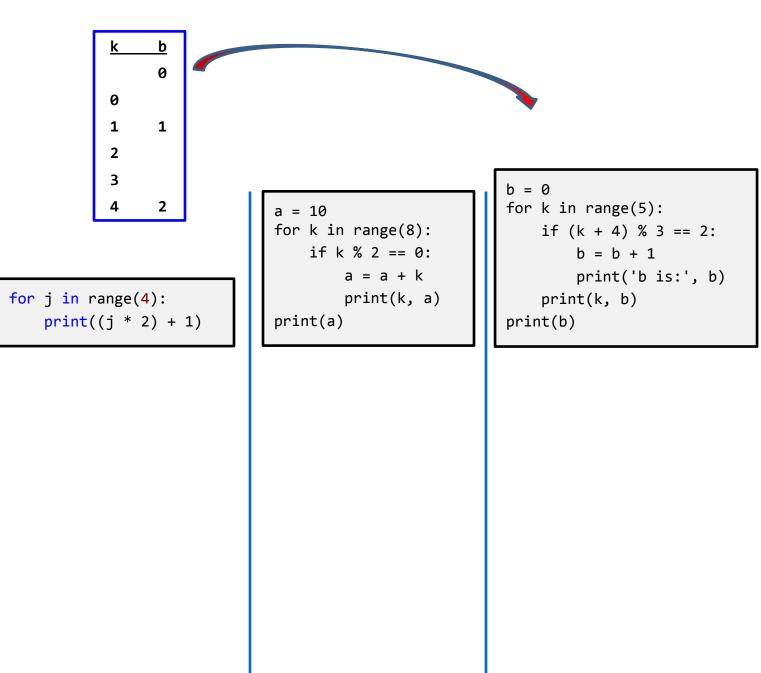

8. What gets printed when **main** is called in the program shown to the right? (Pay close attention to the order in which the statements are executed. Write the output in a column to the left of the program.)



```
def main():
    a = 2
    b = 3
    foo1()
    print(a, b)
    foo2(a, b)
    print(a, b)
    foo3(a, b)
    print(a, b)
def foo1():
    a = 88
    b = 99
def foo2(a, b):
    a = 400
    b = 500
def foo3(x, y):
    x = 44
    y = 55
```

- 9. True or False: As a **user** of a function (that is, as someone who will **call** the function), you don't need to know how the function is **implemented**; you just need to know the **specification** of the function. **True False** (circle your choice)
- 10. List **two** reasons why functions are useful and important.

Reason 1:

Reason 2:

11. Consider the code snippet below. It is a contrived example with poor style, but it will run without errors. What does it print when it runs?

Write your answer in the box to the right of the code.

```
def main():
    one()
    two()
    three()
def one():
    print('One!')
    return 1 + two()
def two():
    print('Two!')
    return 1
    print('Done!')
def three():
    print('Three!', two(), one())
main()
```

Output:		

12. Does the following function meet its specification? If not, why not?

```
def get_number(x):
    Returns x squared plus x cubed, for the given x.
    For example, if x is 5, returns (5 ** 2) + (5 ** 3), which is 150.
    answer = (x ** 2) + (x ** 3)
    print(answer)
```

13. Does the following function meet its specification? If not, why not?

```
def get_number(x):
    Returns x squared plus x cubed, for the given x.
    For example, if x is 5, returns (5 ** 2) + (5 ** 3), which is 150.
    m m m
    answer = (x ** 2) + (x ** 3)
    print(answer)
    return answer
```

14. Does the following function meet its specification? If not, why not?

```
def test_get_number(x):
    """ Tests the get number function. """
    answer1 = get number(5)
    answer2 = get number(1)
    answer3 = get_number(2)
```

15. Consider a function whose name is **print_string** that takes two arguments as in this example:

```
print_string('Robots rule!', 4)
```

The function should print the given string the given number of times. So, the above function call should produce this output:

Robots rule! Robots rule! Robots rule! Robots rule!

Write (in the space to the right) a complete implementation, including the header (def) line, of the above *print_string* function.